



## FIXED SPEED LINEAR ACTUATOR MOTOR FAMILY

## Series K037A323364725E AC Induction Linear Actuator




Item:	Linear Actuator
Rated Load (lbs.):	400 lbs (Tension and Compression)
Voltage:	115 Vac, 60 Hz
Full Load Amps:	1.4 Amps
Capacitor (mfd):	17.5 mfd 370V (Included)
Retracted Dimension (in):	20 in
Travel (in):	12 in
Continuous Duty Travel (in):	84 in
Speed (in/min):	8.4 in/min
Gear Ratio:	24:1
Duty Cycle (%):	25 %
Rotation:	Reversible
Ambient Temp. Max (C/F):	40°C / 104°F
Enclosure Type:	Totally Enclosed Non-Ventilated (TENV)
Motor Type:	Permanent Split Capacitor (PSC)
Thermal Protection:	Auto Reset
Limit Switch Type:	Adjustable
Gears:	Worm
Screw Type:	Acme
Agency Compliance:	UL Recognized (E22922) CSA Certified (LR2459)
Note: Typical data subject to change without notification	

## Additional Info

- AC Induction Linear Actuators
- Internal, adjustable limit switches provide user control in positioning applications.
- Single-lead, rolled-thread lifting screw provides long life and smooth operation. Built-in worm gear is set for quiet gear reduction. Single right-hand Acme screws. Outer tube protects screw and nut from dust.
- Uses: For indoor use; choose totally enclosed nonventilated design for light-duty applications or totally enclosed fan-cooled design for industrial duty.
- Linear motion: 10 to 12"; can be modified to shorter stroke lengths
- 115VAC, 60-Hz PSC motors with auto-reset thermal protection
- Capacitor Included with Motor
- Work-hardened finish





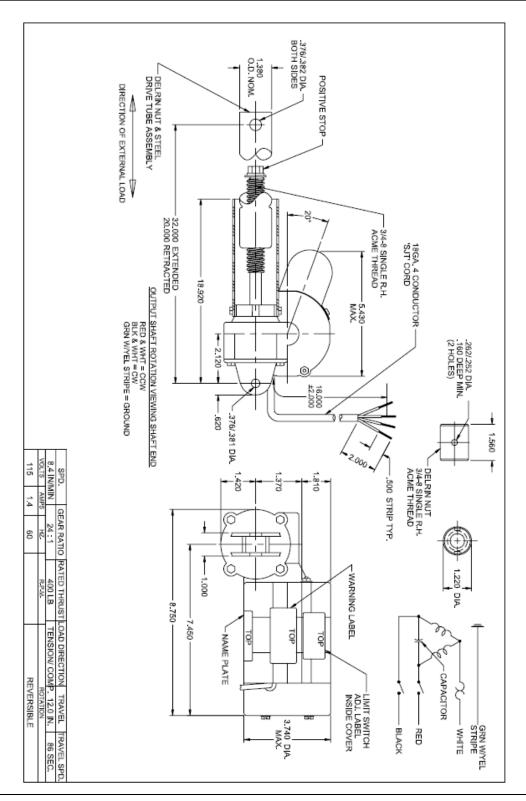

Hurst • 1551 East Broadway Street • Princeton, IN 47670 MOTOR SPECIFICATION SHEET